


Instruction:
 1. Type: Film to Glass
 2. Operating Voltage: ≤10V
 3. Response Time: ≤10ms
 4. Storage Temperature: -20℃~+70℃
 5. Operation Temperature/Humidity: -10℃~+60℃/ 20%~95%
 6. Hitting Life: >1,000,000 Times, 250gf Force;
 7. Writing Life: >100,000 Times 250gf Force;
 8. Connect Material: FPC

9. Film Thickness: 0.188mm
 10. Glass Thickness: 1.1mm
 11. Light transmission: ≥75%
 12. Force: 100g or more
 13. Linearity: ≤1.5%
 14. Insulation: ≥20MΩ
 15. Resistance: X: 538Ω~910Ω
 Y: 170Ω~320Ω
 16. Surface Hardness: ≥3H (pencil)

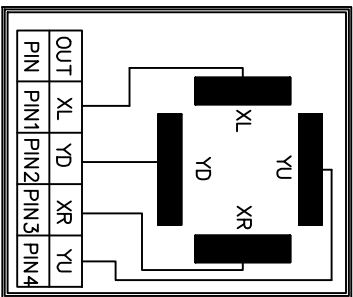

REVISIONS

SCALE	1:1	MATERIAL	F/G	Version	1.0
UNIT	MM	TOLERANCE	±0.3mm	NO.	1 of 1
DESIGN	Jabba	DATE	20090505		
CHECK	pasca	DATE	20090505		
RELEASE	J	DATE	20090505		