
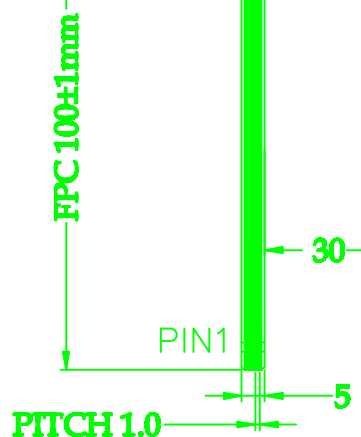


Thick: 1.4 ± 0.15  
 hard coating anti newton ring  
 Front ITO film 0.188mm  
 Back ITO glass 1.1mm



PET 7  
 Conductive 4.5  
 0.3

**Instruction:**  
 1.Type:Film to Glass  
 2.Operating Voltage: ≤10V  
 3.Response Time: ≤10ms  
 4.Storage Temperature: -20℃~+70℃  
 5.Operation Temperature/Humidity: -10℃~+60℃/ 20%~95%  
 6.Hitting Life:>1,000,000 Times ,250gf Force;  
 7.writing Life>100,000 Times250gf Force;  
 8.Connect Material:FPC

9.Film Thickness: 0.188mm  
 10.Glass Thickness: 1.1mm  
 11.Light transmission: ≥78%  
 12.Force: 100g or more  
 13.Linearity: ≤1.5%  
 14.Insulation: ≥20MΩ  
 15.Resistance: Y: 180Ω~380Ω  
 X: 510Ω~900Ω  
 16.Surface Hardness ≥3H(pencil)

| TOUCH SCREEN ET-4060A1 |          |           |          |             |            |     |
|------------------------|----------|-----------|----------|-------------|------------|-----|
| REVISIONS              |          |           |          |             |            |     |
| SCALE                  | 1:1      | MATERIAL  | F/G      |             | Version    | 1.0 |
| UNIT                   | mm       | TOLERANCE | ±0.3mm   |             | NO: 1 of 1 |     |
| DESIGN                 | Lucy     | DATE      | 20101122 | EAGLE TOUCH |            |     |
| CHECK                  | Peter LI | DATE      | 20101122 |             |            |     |
| RELEASE                | Victor   | DATE      | 20101122 |             |            |     |