
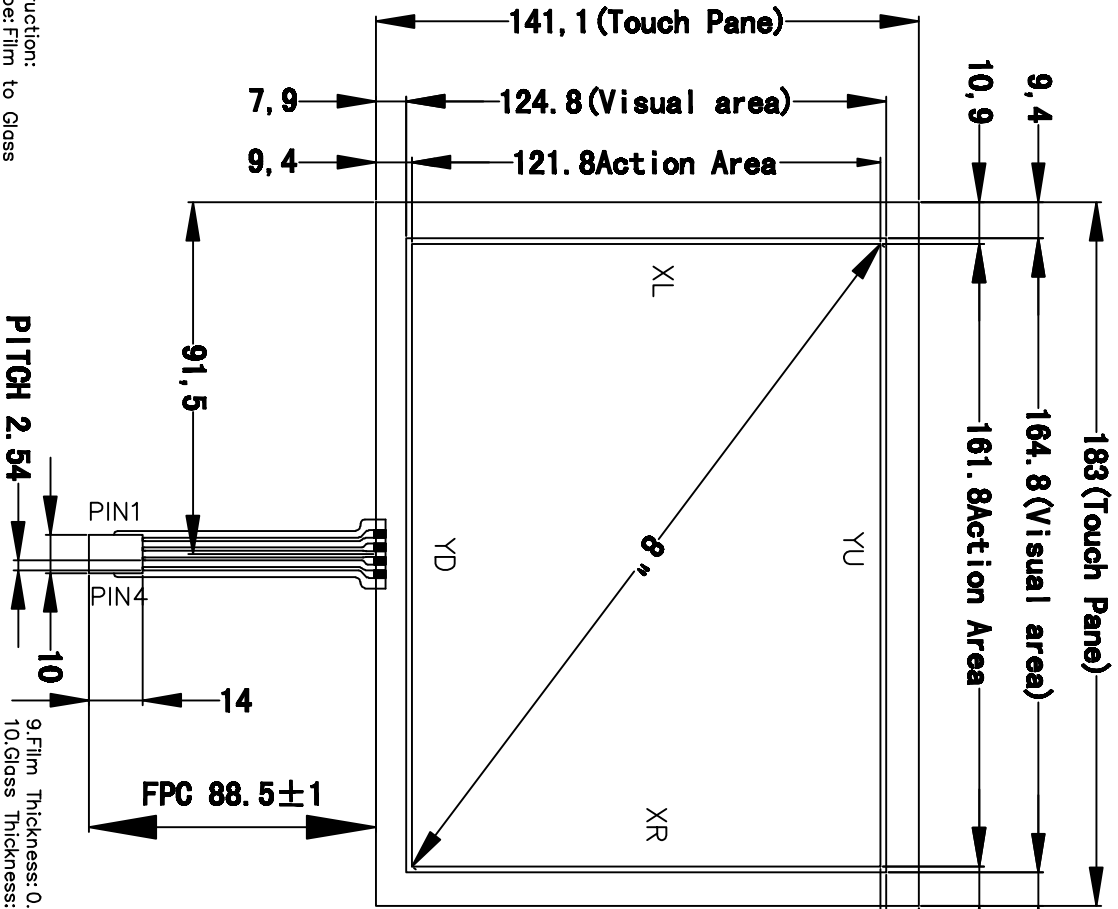


Version	MARK	MODIFY	DATE
2.0	A	FPC	20090713

Thick: 1.4 ± 0.15

Front ITO film 0.188mm
hard coating anti newton ring

Back ITO glass 1.1mm

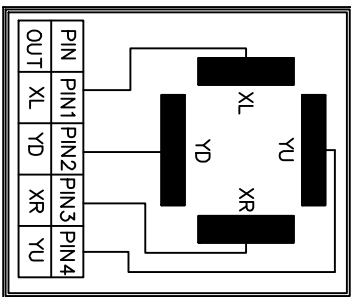

PITCH 2.54

FPC 88.5 ± 1

Eagle Touch

REVISIONS

SCALE	1:1	MATERIAL	F/G	Version
UNIT	mm	TOLERANCE	±0.3mm	NO.
DESIGN	Yukita	DATE	20090505	1 of 1
CHECK	Yukita	DATE	20090505	
RELEASE	J	DATE	20090505	

- Instruction:
- Type: Film to Glass
 - Operating Voltage: ≤10V
 - Response Time: ≤10ms
 - Storage Temperature: -20℃~+70℃
 - Operation Temperature/Humidity: -10℃~+60℃/ 20%~95%
 - Hitting Life: >1,000,000 Times, 250gf Force;
 - Writing Life: >100,000 Times 250gf Force;
 - Connect Material: FPC+PIN
- Film Thickness: 0.188mm
 - Glass Thickness: 1.1mm
 - Light transmission: ≥78%
 - Force: 100g or more
 - Linearity: ≤1.5%
 - Insulation: ≥20MΩ
 - Resistance: X: 410Ω~700Ω; Y: 220Ω~380Ω;
 - Surface Hardness: ≥3H (pencil)